

DH-HAC-B1A41

4MP HDCVI Fixed IR Bullet Camera

HDCVI



- Max. 30fps@4MP
- HD and SD output switchable
- 3.6mm fixed lens (6mm optional)
- Max. IR length 20m, Smart IR
- IP67, DC12V



System Overview

Experience 4MP video and the simplicity of using existing cabling infrastructure with HDCVI. The Cooper series 4MP HDCVI camera features a compact design and offers a high quality image at a friendly price. It offers various vari-focal/fixed lens models with a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

Functions

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 700m for 4MP HD video via coaxial cable, and up to 300m via UTP cable.*

*Actual results verified by real-scene testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Smart IR

The camera is designed with microcrystalline LED IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

Multi-formats

The camera supports multiple video formats including HDCVI, CVBS and other two common HD analog formats in the market. The four formats can be switched over through OSD menu or by PFM820(UTC controller). This feature makes the camera to be compatible with not only XVRs but also most end users' existing HD/SD DVRs.

Multi-language OSD

OSD menu provides multiple image adjustments and function settings to meet the requirements of different monitoring scenes. The OSD menu includes configurations such as backlight mode, day/night, white balance, privacy mask and motion detect. The camera supports 11 languages for OSD menu, namely, Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

With working temperature range of -40°C to +60°C (-40°F to +140°F), the camera is designed for extreme temperature environments.

Supporting ±30% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Technical Specification					
Camera					
Image Sensor		1/2.7" CMOS			
Effective Pixels		2560(H)×1440(V), 4MP			
Scanning System		Progressive			
Electronic Shutter Speed		PAL: 1/25~1/100000s NTSC: 1/30~1/100000s			
Minimum Illumination		0.04Lux/F2.0, 30IRE, 0Lux IR on			
S/N Ratio		More than 65dB			
IR Distance		Up to 20m (66feet)			
IR On/Off Control		Auto / Manual			
Lens					
Lens Type		Fixed lens / Fixed iris			
Mount Type		Board-in			
Focal Length		3.6mm (6mm Optional)			
Max Aperture		F2.0			
Angle of View		3.6mm: 107°x89°x48°(diagonal × horizontal × vertical) 6mm: 61°x54°x31°(diagonal × horizontal × vertical)			
Focus Control		N/A			
Close Focus Distance		1.1m/2.7m (3.6ft/8.6ft)			
DORI distance	Lens	Detect	Observe	Recognize	Identify
	3.6mm	64.0 m (210.0 ft)	25.6 m (84.0 ft)	12.8 m (42.0 ft)	6.4 m (21.0 ft)
	6mm	106.7 m (350.0 ft)	42.7 m (140.0 ft)	21.3 m (70.0 ft)	10.7 m (32.0 ft)
Pan / Tilt / Rotation					
Pan/Tilt/Rotation		Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°			
Video					
Resolution		4M (2560 × 1440); 1080P (1920 × 1080); 960H (960 × 576/960 × 480)			
Frame Rate		CVI: PAL:4M@25fps; 1080P@25fps NTSC:4M@30fps; 1080P@30fps AHD: PAL:4M@25fps; NTSC:4M@30fps; TV: PAL:4M@25fps; NTSC:4M@30fps; CVBS: 960H;			
Video Output		1-channel BNC high definition video output / CVBS video output (Can switch)			
Day/Night		Auto (ICR) / Manual			
OSD Menu		Multi-language			
BLC Mode		BLC / HLC / DWDR			

WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual
Smart IR	Auto / Manual

Certifications	CE (EN55032, EN55024, EN50130-4,EN60950-1) UL (UL60950-1+CAN/CSA C22.2 No.60950-1) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014)
----------------	---

Interface	
Audio Interface	N/A


Eelectrical	
Power Supply	12V DC ±30%
Power Consumption	Max. 3.7W (12V DC, IR on)

Environmental	
Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH * Start up should be done at above-40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH
Ingress Protection & Vandal Resistance	IP67


Construction	
Casing	Plastic
Dimensions	70mm×70mm×149mm (2.76"×2.76"×5.87")
Net Weight	0.15kg (0.33lb)
Gross Weight	0.19kg (0.42lb)

Ordering Information

Type	Part Number	Description
4MP Camera	DH-HAC-B1A41P 3.6 mm	4MP HDCVI Fixed IR Bullet Camera, PAL
	DH-HAC-B1A41P 6 mm	
	DH-HAC-B1A41N 3.6 mm	4MP HDCVI Fixed IR Bullet Camera, NTSC
	DH-HAC-B1A41N 6 mm	
Accessories	PFA134	Water-proof Junction Box
	PFA152-E	Pole Mount Bracket
	PFM800-4K	Passive Video Balun
	PFM820(Only 1080P and below are available)	UTC controller
	PFM321	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

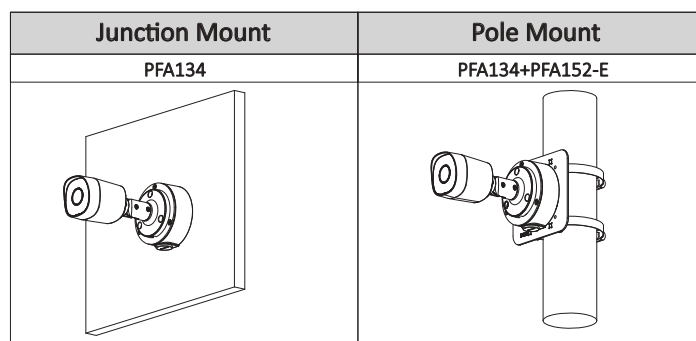


Dimensions (mm/inch)

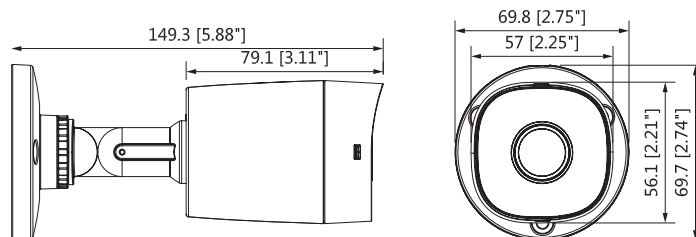

Accessories

Optional:



PFA134
Water-proof Junction Box



PFA152-E
Pole Mount Bracket



PFM800-4K
Passive Video Balun



PFM820
(Only 1080P and below are available)
UTC controller



PFM321
12V 1A Power Adapter



PFM904
Integrated Mount Tester